

# LED Wall Washer

# LAST LIGHT

## Sleek, powerful and efficient

The LED Wall Washer is the ideal solution for architectural, signage and landscape lighting applications.

### FEATURES




- Safe 24V DC operation
- Low power consumption: 5.8W/FT
- Suitable for indoor and outdoor use
- Beam angle: 30°
- Available in 2700K, 3000K, 4000K colour temperatures
- Dimmable with dimmable drivers
- Field cuttable every 6". Custom cuts available.
- Long life 30, 000 hours
- cULus certified for wet locations
- 3 year limited warranty

### APPLICATIONS

- Architectural lighting
- Signage
- Landscape lighting
- Exterior/interior commercial



### DIMENSIONAL DIAGRAM

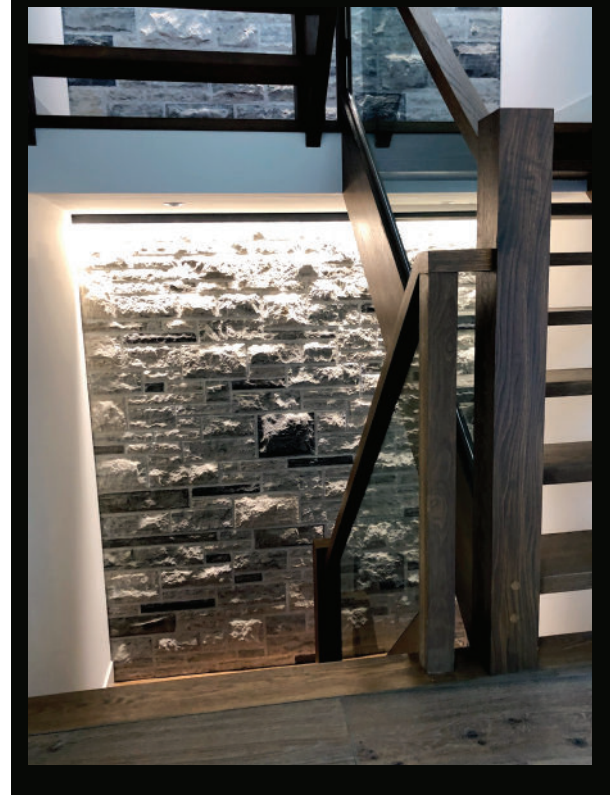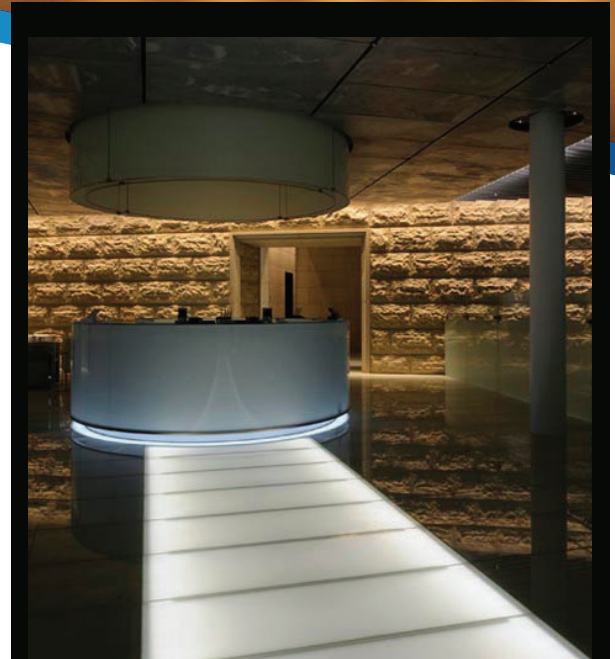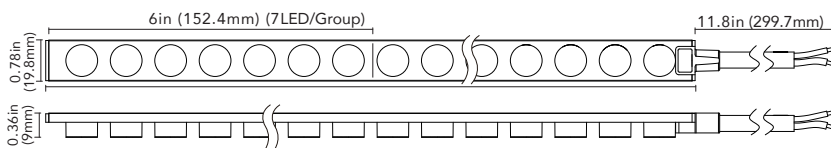

# LED Wall Washer

## EASY INSTALLATION

Field cuttable every 6". Custom lengths available.


## ELECTRICAL

24V DC, 5.8W/FT

## WARRANTY

3 Year Warranty. See full warranty details at [www.magiclite.com](http://www.magiclite.com).

## EXTRUSIONS



**ES-EXT**  
Aluminum extrusion (8FT), anodized black, for ceiling or floor mounting. For wall mounting, please see the wall mounting brackets.



Three wall mounting brackets available to enhance the wall washing effect in various applications.

**ES-MB-2IN**  
2IN Wall Mounting Bracket

**ES-MB-4IN**  
4IN Wall Mounting Bracket

**ES-MB-6IN**  
6IN Wall Mounting Bracket



**ES-MC**  
Mounting Clips  
(4pcs/bag)

## ACCESSORIES



**ES-PFC-6FT**  
6FT Power Feed Connector



**ES-JC-6IN**  
6IN Jumper Cable  
**ES-JC-12IN**  
12IN Jumper Cable  
**ES-JC-3FT**  
3FT Jumper Cable  
**ES-JC-6FT**  
6FT Jumper Cable



**ES-EC**  
End Cap



**NFLX-GLUE**  
Glue

## INDOOR/OUTDOOR DIMMABLE DRIVERS

**MLDRE-40-24-DM**  
6.77" X 2.67" X 1.26" (171 X 68 X 32mm)

**MLDRE-96-24-DM**  
6.77" X 2.67" X 1.26" (171 X 68 X 32mm)

## NON-DIMMABLE DRIVERS

**MLDR-120-24**  
Indoor/Outdoor driver 120W hardwire  
Input: 100 - 240V AC; Output: 24V DC  
10" x 3 3/8" x 3 3/16" (254 x 85.7 x 80.9mm)

## SPECIFICATIONS

Product Code	ES-LS2835-27K-42-24-30 ES-LS2835-30K-42-24-30 ES-LS2835-40K-42-24-30
Colour Temperature	2700K, 3000K, 4000K
Input Voltage	24V DC
Power Consumption (W)	5.8W/FT
Luminous Flux	580LM/FT(2700K), 610LM/FT(3000K), 640LM/FT(4000K)
Efficacy	100LM/W (2700K), 105LM/W (3000K), 110LM/W (4000K)
LEDs	SMD2835
Colour Rendering Index	90+
Max Run	16 FT
Life Span (hours)	30,000
Beam Angle	30°
Approvals	cULus for wet locations

## NOTE:

The product is sold in 33FT rolls, but the maximum single run is 16FT. Custom lengths available.

LAST  
LIGHT

illuminating  
landscapes,  
transforming  
spaces

[hello@shoplastlight.com](mailto:hello@shoplastlight.com)

[www.shoplastlight.com](http://www.shoplastlight.com)